

THROUGH-HOLE RADIAL ENCAPSULATED POWER INDUCTOR

YCLGB 0709C-0809C SERIES



FEATURES:

- Plastic housing
- Water proof structure Ferrite Core
- Excellent Mechanical Strength
- Excellent Solderability
- High Reliability

OPTIONS:

- Packaging:Tape & Reel is standard (Qty:2000pcs)
- Bulk packaging available for smaller quantities
- Tolerance:10% and 5% is standard, tighter tolerances available

COMMON APPLICATIONS:

- VCRs, PDP, LCD, TV set
- Automotive Systems
- Computer Peripheral Equipment
- GPS, DC/DC convertor, XDSL Modem
- Electronic Games
- Communications Equipment
- General Electronic Applications

ELECTRICAL CHARACTERISTICS:


Part Number	L μH	Test Freq KHz	DCR Ω Max	IDC Max A	Part Number	L μH	Test Freq KHz	DCR Ω Max	IDC Max A
YCLGB0709C-1R0M	1.00	1	0.006	5.00	YCLGB0809C-2R2M	2.20	1	0.011	4.00
YCLGB0709C-1R5M	1.50	1	0.008	4.30	YCLGB0809C-3R3M	3.30	1	0.013	3.40
YCLGB0709C-2R2M	2.20	1	0.011	3.70	YCLGB0809C-4R7M	4.70	1	0.017	3.00
YCLGB0709C-3R3M	3.30	1	0.018	2.90	YCLGB0809C-6R8M	6.80	1	0.023	2.60
YCLGB0709C-4R7M	4.70	1	0.022	2.60	YCLGB0809C-100M	10	1	0.031	2.20
YCLGB0709C-6R8M	6.80	1	0.028	2.30	YCLGB0809C-150M	15	1	0.042	1.90
YCLGB0709C-100M	10	1	0.043	1.90	YCLGB0809C-220M	22	1	0.070	1.50
YCLGB0709C-150M	15	1	0.056	1.60	YCLGB0809C-330M	33	1	0.092	1.20
YCLGB0709C-220M	22	1	0.086	1.30	YCLGB0809C-470M	47	1	0.130	1.00
YCLGB0709C-330M	33	1	0.140	1.00	YCLGB0809C-680M	68	1	0.160	0.97
YCLGB0709C-470M	47	1	0.170	0.94	YCLGB0809C-101K	100	1	0.230	0.81
YCLGB0709C-680M	68	1	0.280	0.73	YCLGB0809C-151K	150	1	0.400	0.61
YCLGB0709C-101K	100	1	0.330	0.67	YCLGB0809C-221K	220	1	0.530	0.53
YCLGB0709C-151K	150	1	0.560	0.52	YCLGB0809C-331K	330	1	0.780	0.44
YCLGB0709C-221K	220	1	0.720	0.46	YCLGB0809C-471K	470	1	1.000	0.39
YCLGB0709C-331K	330	1	1.100	0.37	YCLGB0809C-681K	680	1	1.500	0.32
YCLGB0709C-471K	470	1	1.700	0.30	YCLGB0809C-102K	1000	1	2.200	0.26
YCLGB0709C-681K	680	1	2.300	0.26	YCLGB0809C-152K	1500	1	3.500	0.21
YCLGB0709C-102K	1000	1	4.300	0.19					
YCLGB0709C-152K	1500	1	5.000	0.16					

Note:1. K= ± 10%,M= ± 20%,N= ± 30%

TECHNICAL INFORMATION:

- Testing: (Equivalent acceptable) Inductance:HP4284A
RDC:QuadTech 1880 Milliohm meter
Q- HP4342A – SRF-HP4191A
IDC Max is decreased 10% against its initial value
 - Operating temperature: -40°C to +105°C
 - Storage Temperature: -40°C to +105°C
 - Solder methods: Vapor Phase,Infrared Reflow
 - Resistance to soldering heat:260°C for 10 seconds
 - Solvent resistance: Conforms to MIL-STD-202E
 - Marking: Inductance & Tolerance
- Note:All specifications subject to change without notice.

PHYSICAL CHARACTERISTICS:

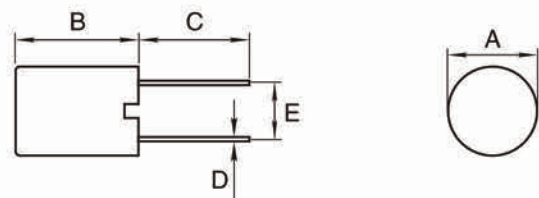

DIMENSIONS IN:mm

Part number	A	B	C	D	E
FALGB0709C	8.0Max	9.6Max	5.0Min	0.6	5.0
FALGB0809C	9.0Max	9.6Max	5.0Min	0.6	5.0

Note:All specifications subject to change without notice.