



THROUGH-HOLE RADIAL SHIELDED POWER INDUCTOR

YCLGS 1014-1159 SERIES

FEATURES:

- Magnetically Shielded Construction
- Heat Resistant Molded Resin
- Excellent Mechanical Strength
- Excellent Solderability
- High Reliability
- Low DCR Large Current

OPTIONS:

- Packaging: Tape & Reel is standard (Qty: 2000pcs)
- Bulk packaging available for smaller quantities
- Tolerance: 10% and 5% is standard, tighter tolerances available

COMMON APPLICATIONS:


- VCRs, AC/DC, DC/DC Converter
- Video Cameras
- Communication System
- Automotive Systems
- Liquid Crystal Televisions
- Power Supplier
- Network Systems
- Computer Peripheral Equipment

ELECTRICAL CHARACTERISTICS:

Part Number	L mH	Test Freq KHz	Q Min	DCR (Ω) Max	IDC Max mA
YCLGS1014-122K	1.2	1	50	1.2	200
YCLGS1014-152K	1.5	1	50	1.5	200
YCLGS1014-182K	1.8	1	50	1.6	200
YCLGS1014-222K	2.2	1	50	1.8	200
YCLGS1014-272K	2.7	1	40	1.9	200
YCLGS1014-332K	3.3	1	40	2.3	200
YCLGS1014-392K	3.9	1	40	2.5	200
YCLGS1014-472K	4.7	1	40	3.7	140
YCLGS1014-502K	5.0	1	40	3.8	140
YCLGS1014-562K	5.6	1	40	4.0	140
YCLGS1014-682K	6.8	1	40	4.2	140
YCLGS1014-822K	8.2	1	40	5.3	140
YCLGS1014-103K	10	1	100	7.3	100
YCLGS1014-123K	12	1	100	8.3	100
YCLGS1014-153K	15	1	100	11.0	90
YCLGS1014-183K	18	1	100	13.6	75
YCLGS1014-223K	22	1	100	15.4	75
YCLGS1014-273K	27	1	100	17.9	75
YCLGS1014-333K	33	1	100	23.3	60
YCLGS1014-393K	39	1	100	25.9	60
YCLGS1014-473K	47	1	80	30.4	60
YCLGS1014-503K	50	1	80	37.8	50
YCLGS1014-563K	56	1	80	39.1	50
YCLGS1014-683K	68	1	50	40	50
YCLGS1014-823K	82	1	50	47	40
YCLGS1014-104K	100	1	120	50	40
YCLGS1014-124K	120	1	100	91	30
YCLGS1014-154K	150	1	90	140	20
YCLGS1014-184K	180	1	90	164	20
YCLGS1014-224K	220	1	90	182	20
YCLGS1014-274K	270	1	90	200	20
YCLGS1014-334K	330	1	80	275	15
YCLGS1014-394K	390	1	80	300	15
YCLGS1014-474K	470	1	80	345	15
YCLGS1014-564K	560	1	60	520	8.4
YCLGS1014-684K	680	1	60	590	8.4
YCLGS1014-824K	820	1	50	675	8.4
YCLGS1014-105K	1000	1	50	770	8.4
YCLGS1014-125K	1200	1	50	845	8.4

Note: 1. K = $\pm 10\%$, M = $\pm 20\%$, N = $\pm 30\%$

PHYSICAL CHARACTERISTICS:

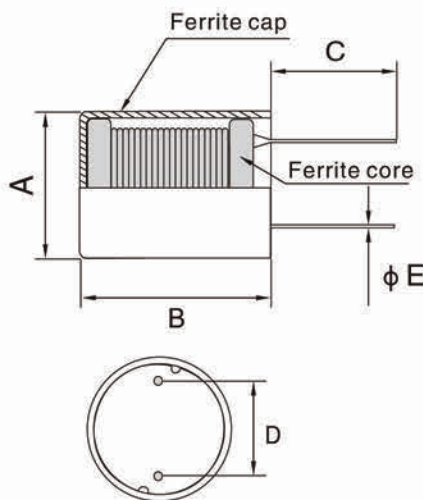

Dimension: mm

Part Number	A	B	C	D	E
YCLGS1009	11.0Max	9.5Max	5.0Min	5.0 $\pm$ 0.5	0.7
YCLGS1014	11.0Max	14.0Max	5.0Min	5.0 $\pm$ 0.5	0.7
YCLGS1216	12.5Max	16.0Max	5.0Min	5.0 $\pm$ 0.5	0.8
YCLGS1519	16.0Max	19.5Max	5.0Min	7.5 $\pm$ 0.5	0.8

TECHNICAL INFORMATION:

- IDC Max: Determined when superimposed
- Testing: (Equivalent acceptable) Inductance: HP4342A, HP4284A
RDC: QuadTech 1880 Milliohm meter
Q- HP4342A - SRF-HP4191A
- DC current is decreased 10% against its initial value
- Operating temperature: -40°C to $+105^{\circ}\text{C}$
- Storage Temperature: -40°C to $+105^{\circ}\text{C}$
- Solder methods: Vapor Phase, Infrared Reflow
- Resistance to soldering heat: 260°C for 10 seconds
- Solvent resistance: Conforms to MIL-STD-202E
- Marking: Inductance & Tolerance

Note: All specifications subject to change without notice.

Note: All specifications subject to change without notice.