

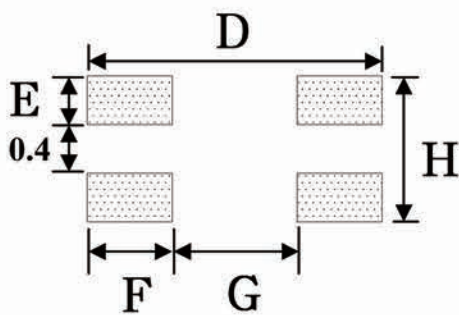




【YCCMF3216F/2012/2012F-SERIES】

DIMENSIONS & RECOMMENDED

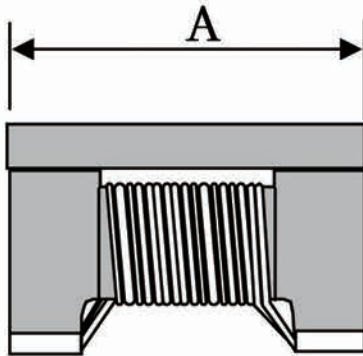

Unit: mm

SELECTION GUIDE FOR STANDARD COILS

SDE Part Number	Commom- Mode Impedance	DC Resistance	Inductance Decrease Current	Rated Voltage	Withsatanding Voltage	Insulation Resistance
	(Ω) at 100MHz	(Ω) Max	(A) Max	(V)	(V)	(Ω) Min
YCCMF2012 - 670 - 2P - T	67 ± 25%	0.35	0.33	50	125	0.01
YCCMF2012 - 900 - 2P - T	90 ± 25%	0.35	0.33	50	125	0.01
YCCMF2012 - 121 - 2P - T	120 ± 25%	0.45	0.28	50	125	0.01
YCCMF2012 - 181 - 2P - T	180 ± 25%	0.50	0.25	50	125	0.01
YCCMF2012F - 670 - 2P - T	67 ± 25%	0.25	0.40	50	125	0.01
YCCMF2012F - 900 - 2P - T	90 ± 25%	0.35	0.33	50	125	0.01
YCCMF2012F - 121 - 2P - T	120 ± 25%	0.30	0.37	50	125	0.01
YCCMF2012F - 181 - 2P - T	180 ± 25%	0.35	0.33	50	125	0.01
YCCMF2012F - 261 - 2P - T	260 ± 25%	0.40	0.30	50	125	0.01
YCCMF2012F - 371 - 2P - T	370 ± 25%	0.40	0.28	50	125	0.01
YCCMF3216F - 900 - 2P - T	90 ± 25%	0.30	0.37	50	125	0.01
YCCMF3216F - 161 - 2P - T	160 ± 25%	0.40	0.34	50	125	0.01
YCCMF3216F - 261 - 2P - T	260 ± 25%	0.50	0.31	50	125	0.01
YCCMF3216F - 601 - 2P - T	600 ± 25%	0.80	0.26	50	125	0.01
YCCMF3216F - 102 - 2P - T	1000 ± 25%	1.00	0.23	50	125	0.01
YCCMF3216F - 222 - 2P - T	2200 ± 25%	1.20	0.20	50	125	0.01

	A	B	C	D	E	F	G	H
YCCMF3216F	3.2±0.2	1.6±0.2	1.2±0.2	3.7	0.6	1.05	1.6	1.6
YCCMF2012F	2.0±0.2	1.2±0.2	1.0±0.2	2.6	0.4	0.8	1.0	1.2
YCCMF2012	2.0±0.2	1.2±0.2	1.8±0.2	2.6	0.4	0.8	1.0	1.2

※ FEATURES

- Applications : personal computers, peripheral equipment(USB), amusement equipment, LCD panels (LVDS)