



SQ型磁芯 SQ CORES

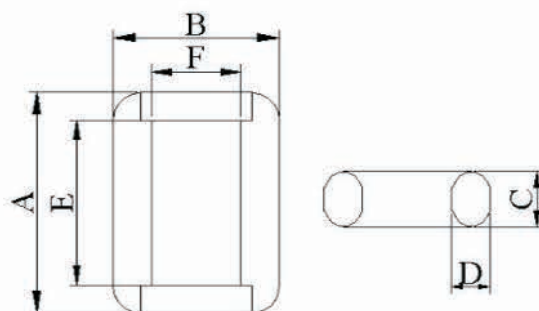


Fig. 1

型号 Type	图例	尺寸 Dimension (mm)						重量
		A	B	C	D	E	F	
SQ1515	1	15.2±0.4	15.2±0.4	5.1±0.30	4.7±0.30	11.0±0.4	5.90±0.4	3.65g
SQ1614	1	16.5±0.5	14.0±0.3	5.0±0.20	4.5±0.20	12.5±0.5	5.00±0.3	3.60g
SQ1916	1	19.0±0.5	16.0±0.5	5.5±0.20	5.0±0.15	14.0±0.5	6.00±0.5	5.10g
SQ1918	1	19.0±0.4	18.3±0.4	5.5±0.20	5.04±0.20	14.0±0.3	8.22±0.3	5.50g
SQ2018	1	20.4±0.4	18.3±0.5	5.5±0.20	5.04±0.20	14.0±0.3	8.22±0.3	6.20g
SQ2318	1	22.8±0.4	18.1±0.4	5.0±0.30	4.5±0.25	14.8±0.4	9.10±0.4	5.90g
SQ2418	1	24.0±0.3	17.5±0.4	6.0±0.20	5.5±0.25	20.0±0.3	6.50±0.4	7.60g
SQ2521	1	24.7±0.5	21.3±0.5	5.2±0.20	4.9±0.20	15.9±0.4	11.50±0.4	7.50g
SQ2820	1	28.0±0.4	20.0±0.4	6.5±0.20	6.0±0.25	22.0±0.4	8.00±0.4	10.50g
SQ4319	1	43.0±0.8	19.2±0.4	6.8±0.25	6.1±0.25	33.0±0.6	7.00±0.4	17.50g

型号 Type	有效参数 Effective parameter				AL 值 AL (nH/N)			
	C _i (mm ⁻¹)	Le (mm)	Ae (mm ²)	Ve (mm ³)	GH5	GH7	GH10	GH12
SQ1515	2.64	39.36	14.87	586.00			3000±30%	3500±30%
SQ1614	2.74	39.91	14.57	581.35			4200±30%	5000±30%
SQ1916	2.46	47.28	19.20	908.26			4600±30%	5600±30%
SQ1918	2.77	53.83	17.34	933.07			4500±30%	5400±30%
SQ2018	2.51	55.15	21.92	1209.20			3700±30%	4500±30%
SQ2318	2.63	58.59	22.34	1309.00			4600±30%	5000±30%
SQ2418	2.81	52.88	18.75	991.99			4250±30%	4500±30%
SQ2521	2.86	69.25	24.24	1678.36			4800±30%	5300±30%
SQ2820	2.43	67.57	27.78	1877.59			3700±30%	4500±30%
SQ4319	2.46	96.88	39.30	3808.04			3500±30%	4500±30%