




EE、EF 型磁芯



型号 Type	尺寸 Dimension(mm)						重量 (g)
	A	B	C	D	E min	F	
EE6.5	6.75 ± 0.2	3.25 ± 0.15	3.0 ± 0.15	1.3 ± 0.15	5.1	2.55 ± 0.15	0.8
EE8.3	8.7 ± 0.3	4.1 ± 0.2	3.9 ± 0.2	1.85 ± 0.15	6.1	3.1 ± 0.2	1.0
EE10A	10.2 ± 0.3	5.5 ± 0.2	4.75 ± 0.15	2.45 ± 0.15	7.9	4.2 ± 0.2	1.9
EE10B	10.5 ± 0.5	5.5 ± 0.15	9.8 ± 0.3	2.4 ± 0.3	7.6	4.3 ± 0.2	4.0
EE12	11.9 ± 0.4	6.5 ± 0.3	3.7 ± 0.2	2.5 ± 0.2	8.6	4.9 ± 0.3	1.9
EF12.2	12.2 ± 0.3	5.2 ± 0.3	4.0 ± 0.3	3.2 ± 0.2	8.8	3.8 ± 0.2	1.84
EF12.6	12.6 ± 0.4	6.4 ± 0.2	3.6 ± 0.2	3.6 ± 0.2	9.0	4.7 ± 0.2	2.3
EE13A	13.2 ± 0.4	6.3 ± 0.3	6.0 ± 0.3	2.7 ± 0.3	10.0	4.7 ± 0.3	3.4
EE13B	13.2 ± 0.4	6.3 ± 0.3	9.8 ± 0.3	2.7 ± 0.3	9.8	4.7 ± 0.3	5.6
EE13C (H)	13.3 ± 0.4	6.15 ± 0.15	6.1 ± 0.3	2.7 ± 0.3	10.0	4.8 ± 0.3	3.6
EE13-J	13.25 ± 0.3	7.1 ± 0.2	$10.0+0/-0.3$	$3.8+0/-0.3$	9.3	4.8 ± 0.2	6.6

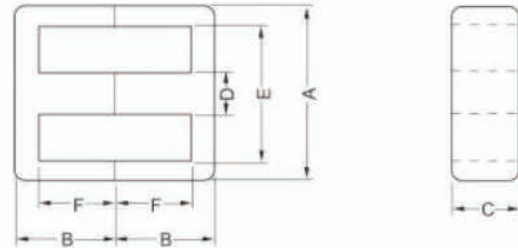

型号 Type	尺寸 Dimension (mm)						重量 (g)
	A	B	C	D	E min	F	
EE14	15.7±0.30	7.4±0.15	3.0±0.1	3.75±0.15	10.0	5.2+0.3/-0	2.7
EE16 (C H)	16.0±0.5	7.3±0.3	5.0±0.3	4.0±0.3	11.8	5.2±0.3	4.0
EEL16A	16.0±0.4	12.5±0.2	4.8±0.2	4.0±0.2	11.7	10.35±0.2	6.3
EEL16	16.8±0.5	12.4±0.3	4.85±0.25	4.0±0.3	11.8	10.25±0.25	6.3
EE16W (H)	16.0±0.5	7.3±0.3	6.7±0.3	4.0±0.3	11.6	5.2±0.3	6.2
EE16-12W (C H)	16.4±0.5	6.2±0.15	7.2±0.2	4.55±0.2	11.7	4.0±0.15	5.5
EF16	16.2±0.6	8.1±0.3	4.5±0.3	4.5±0.3	11.4	5.9±0.3	4.8
EE17	16.5+0.4/-0.3	8.4+0/-0.3	8.4+0/-0.3	4.7+0/-0.3	11.7	5.7+0.4/-0	9.1
EE19A	19.2±0.5	8.1±0.3	5.0±0.2	4.6±0.3	14.2	5.8±0.3	5.4
EE19B	19.2±0.5	8.1±0.3	9.5±0.3	4.6±0.3	14.2	5.8±0.3	11.1
EE1916D	19.2±0.4	8.0±0.2	4.9±0.2	4.9±0.2	14.1	5.8±0.3	5.7
EE1918	19.1±0.5	9.9±0.25	5.0±0.5	4.55±0.5	14.0	7.6±0.15	6.8
EEL19A (H)	19.1±0.3	13.55±0.25	5.0±0.2	4.7±0.3	14	11.15±0.35	8.2
EEL19B	19.2±0.5	13.7±0.3	4.9±0.3	4.7±0.3	14.0	11.5±0.3	8.4
EE2017	19.80±0.40	8.60±0.20	2.20±0.20	8.20±0.20	15.20±0.40	6.40±0.20	3.6
EE20W	21.2±0.4	10.3±0.2	10.5±0.2	5.5±0.2	15.3	7.4±0.2	15.8
EEL20	20.1±0.5	13.9±0.3	4.8±0.3	4.8±0.3	14.6	11.7±0.3	8.4
EF20	20.0±0.5	10.1±0.3	5.7±0.3	5.7±0.3	14.1	7.6±0.3	9.0
EF20	20.1±0.5	10.1±0.3	5.7±0.3	5.7±0.3	14.1	7.3±0.3	9.0
EF20D (H)	20.5±0.5	10.2±0.3	5.6±0.2	5.6±0.2	14.5	7.5±0.3	9.0
EF21 (H)	21.0±0.50	10.3±0.20	5.70±0.25	5.50±0.25	15.2	7.40±0.20	8.6
EE22 (H)	22.4±0.5	9.5±0.4	5.65±0.25	5.65±0.25	16.0	5.6±0.4	9.1
EEL22	22.0±0.4	15.0±0.4	5.75±0.25	5.75±0.25	15.6	11.3±0.2	13.4
EEL2222	22.2±0.4	22.2±0.4	4.7±0.3	5.8±0.3	15.6	18.2±0.2	15.2
EE2318	23.0±0.4	9.0±0.15	8.2±0.2	7.2±0.2	16.6	5.4±0.15	13.9
EE2318W	23.0±0.4	9.0±0.15	10.75±0.2	7.2±0.2	16.6	5.4±0.15	18.4
EE25A (H)	25.4±0.5	10.0±0.3	6.4±0.3	6.0±0.3	18.5	7.0±0.3	11.4
EE25B	25.4±0.5	10.0±0.3	6.8±0.3	6.0±0.3	18.5	7.0±0.3	12.0
EEL25	25.4±0.5	16.3±0.4	6.3±0.3	6.3±0.3	18.6	13.3±0.4	17.4
EE2515W	25.00±0.4	7.25±0.15	13.8±0.30	7.2±0.25	17.6	2.05±0.15	31.2
EE2518W	25.05±0.75	9.0±0.25	10.75±0.3	7.25±0.25	17.8	5.4±0.25	20.3
EE2525W	25.05±0.75	12.55±0.25	10.75±0.3	7.25±0.25	17.5	8.95±0.25	25.7
EF25	25.0±0.6	12.5±0.4	7.0±0.4	7.0±0.3	18.3	9.2±0.3	15.0
EF25D	25.05±0.75	12.55±0.25	7.2±0.3	7.25±0.25	17.5	8.95±0.25	17.4
EF25-1 (H)	25.4±0.7	12.6±0.25	7.2±0.25	7.25±0.25	18.6	9.1±0.25	18.5
EE26-14 (H)	26.05±0.4	6.95±0.2	10.75±0.3	7.25±0.25	18.5	3.55±0.2	16.8



型号 Type	尺寸 Dimension(mm)						重量 (g)
	A	B	C	D	E min	F	
EE26.5	26.7±0.5	10.8±0.3	11.0±0.3	7.2±0.3	19.0	6.8±0.3	24.2
EE2714	26.45±0.35	7.15±0.15	10.75±0.20	7.25±0.25	19.4	3.75±0.15	14.7
EE28 (H)	28.5±0.6	10.0±0.3	10.4±0.3	7.2±0.3	19.0	6.8±0.3	21
EE2821T (H)	28.40±0.5	10.30±0.2	10.70±0.3	7.20±0.3	20.00	6.30±0.2	23
EEL28	28.2±0.5	17.1±0.3	10.4±0.3	7.1±0.3	18.9	12.8±0.4	32
EE30	30.0±0.7	15.0±0.2	7.05±0.25	6.95±0.25	19.6	10.0±0.2	23.6
EE3011	30.0±0.5	13.2±0.2	10.7±0.3	10.7±0.3	19.8	8.1±0.2	35
EE33-27	33.0±0.6	14.3±0.3	12.5±0.3	9.4±0.3	23.6	10.0±0.2	43.8
EE35	35.0±0.5	14.5±0.25	9.5±0.3	9.5±0.3	25	10.0±0.3	33.2
EE3514	35.0±0.5	7.3±0.2	12.0±0.3	6.0±0.25	29.5±0.5	4.3±0.2	21.6
EE40 (H)	40.0±0.7	17.5±0.4	11.7±0.4	11.5±0.4	27.2	10.6±0.4	63.6
EE4133	41.3±0.75	16.8±0.2	12.7±0.25	12.7±0.25	28.0	10.4±0.20	69.0
EE42 (H)	42.1±0.9	21.2±0.4	14.9±0.3	12.0±0.3	29.5	15.4±0.3	94.4
EE4214	42.0±0.5	7.4±0.15	16.0±0.3	6.0±0.25	36.0	4.4±0.15	31.6
EE4220 (H)	42.1±0.9	21.2±0.4	19.9±0.3	12.0±0.3	29.5	15.4±0.3	126.4
EE50	50.0±1.0	21.5±0.25	14.6±0.3	14.5±0.3	35±0.7	12.9±0.25	113.6
EE5154	50.5±1.0	26.8±0.2	12.0±0.3	16.0±0.25	33.9	18.8±0.2	120
EE55A	55.0±1.0	27.5±0.3	17.0±0.7	16.7±0.3	37.0	18.8±0.3	192
EE55B	55.0±1.0	27.7±0.3	20.9±0.5	16.9±0.3	37.5	18.8±0.3	232
EE56	56.5±1.0	27.8±0.3	20.6±0.3	16.85±0.3	37.5	19.0±0.3	237
EE5625	56.5±1.0	27.8±0.3	24.7±0.3	16.85±0.3	37.5	19.0±0.3	282
EE65A	65.4±1.6	32.6±0.6	19.8±0.7	19.8±0.7	44.2	22.6±0.6	309
EE65B (C H)	65.4±1.6	32.6±0.6	27.0±0.6	19.8±0.7	44.2	22.6±0.6	414
EE70	70.0±1.5	33.0±0.3	31.75±0.8	21.5±0.6	48.0	22.5±0.3	560
EE7091	70.0±1.0	45.5±0.35	19.5±0.3	19.5±0.3	50+0.8/-0.7	35.5±0.35	411.2
EE7091B	70.0±1.0	45.5±0.35	29.5±0.5	19.5±0.3	50+0.8/-0.7	35.5±0.35	621
EE7091C	70.0±1.0	45.5±0.35	39.0±0.5	19.5±0.3	50+0.8/-0.7	35.5±0.35	820
EE80	80.5±1.5	38.0±0.4	20.0±0.5	20.0±0.4	60	28.0±0.3	394
EE85	85.0±1.2	43.5±0.5	26.0±0.6	26.4±0.6	56.0	30.5±0.5	716
EE85B	85.0±1.2	43.5±0.5	31.0±0.6	26.4±0.6	56.0	30.5±0.5	856
EE100	100.0±2.0	60.0±0.6	28.0±1.0	28.0±1.0	71.5	46.5±1.2	1176
EE110	110.0±2.0	55.0±0.6	36.0±1.0	36.0±1.0	75.0	38.0±0.6	1564
EE118	118.0±1.8	86.5±0.4	35.5±0.5	35.5±0.5	83.0+1.5/-1.0	69.0±0.4	2450



型号 Type	有效参数 Effective parameter				AL 值 AL (nH/N2)					
	C1 (mm-1)	Le (mm)	Ae (mm2)	Ve (mm3)	GS3	GP4	GP95	GH5	GH7	GH10
EE6.5	3.85	16.23	4.21	68.35						1000±25%
EE8.3	2.75	19.2	7	134	630±25%	550±25%		1200±25%	1300±25%	1500±25%
EE10A	2.16	26.1	12.1	315	940±25%	800±25%		1700±25%	2000±25%	2300±25%
EE10B	1.1	26.4	23.1	611.6	2500±25%	1900±25%				
EE12	3.19	29.55	9.25	352.3						3000±25%
EE12.2	2	25.5	12.8	337.9						3000±25%
EF12.6	2.39	29.69	12.4	367				1660±25%	2100±25%	3500±25%
EE13A	1.86	30.2	16.2	586	1200±25%	1000±25%		2200±25%	2700±25%	3100±25%
EE13B	1.13	29.95	26.46	975	2600±25%	2200±25%				
EE13C	2.28	30.2	17.1	517	1200±25%	1000±25%				
EE13-J	0.81	31.24	38.44	1201						
EE14	1.98	35.04	17.66	618.8						3000 MIN
EE16	1.8	34.8	19	670	1300±25%	1100±25%		2400±25%	2800±25%	3200±25%
EEL16A	2.78	55.67	20.01	1114		800±25%				
EEL16	2.9	55.1	19	1048	950±25%	770±25%		1700±25%	2100±25%	2500±25%
EE16W	1.44	37.9	26.2	993	2217±25%	1350±25%				
EE16-12W	0.92	30.22	32.69	987.9		1500±25%				
EF16	1.87	37.6	20.1	754	1300±25%	1000±25%		2300±25%	2800±25%	3200±25%
EE17	1.36	33.99	24.97	849.0						
EE19A	1.73	39.8	23	910	1400±25%	1200±25%		2600±25%	3100±25%	3600±25%
EE19B	0.9	39.9	44.5	1777.5	2000±25%	1700±25%				
EE1916D	2.08	47.6	22.9	1090		1200±25%				
EE1918	2.08	47.6	22.9	1090		950±25%				
EEL19A	2.78	62.2	22.4	1393	1030±25%	830±25%		1800±25%	2300±25%	2800±25%
EEL19B	2.65	62.1	23.4	1450	1000±25%	840±25%				
EE2017	3.66	40.10	10.94	438.7			800±25%			
EE20W	0.81	46.3	57.8	1475		2100±25%				
EEL20	2.55	62.74	24.5	1541.8		860±25%		2800±25%	3500±25%	4200±25%
EF20	1.41	46.55	32.9	1531.9	1500±25%	1250±25%		3300±25%	4000±25%	4700±25%
EF20	1.41	46.55	32.9	1531.9				3300±25%	4000±25%	4700±25%
EF20D	1.38	43.0	31.0	1340.0		1500±25%				
EF21	1.55	48.7	31.5	1534.6		1300±25%				
EE22	1.29	41.22	31.92	1749	2160±25%	1790±25%		3900±25%	4700±25%	5600±25%
EEL22	1.82	63.6	35	2220	1600±25%	1300±25%		2800±25%	3500±25%	4200±25%



型号 Type	有效参数 Effective parameter				AL 值 AL (nH/N2)					
	C1 (mm-1)	Le (mm)	Ae (mm2)	Ve (mm3)	GS3	GP4	GP95	GH5	GH7	GH10
EEL2222	3.15	93.2	29.6	2757		650±25%				
EE2318	0.72	42.6	59	2548		2500±25%				
EE2318W	0.56	42.33	74.62	3159.5		3000±25%				
EE25A	1.28	49.5	38.4	2131	2300±25%	1900±25%		4100±25%	5100±25%	6000±25%
EE25B	1.21	49.5	40.8	2264	2300±25%	1900±25%				
EEL25	1.9	76.7	40.4	3097	1600±25%	1300±25%		2800±25%	3600±25%	4300±25%
EE2515W	0.29	29.4	99.36	4414		4800±25%				
EE2518W	0.56	43.6	77.3	3371		3200±25%				
EE2525W	0.75	56.92	77.9	4786		2850±25%				
EF25	1.22	57.8	47.2	2700	2300±25%	1900±25%		4100±25%	5100±25%	6000±25%
EF25D	1.06	57.6	54	3267		1900±25%				
EF25-1	1.15	57.96	50.03	2899		1900±25%				
EE2614	0.488	36.82	75.31	2773		3920±25%				
EE26.5	0.62	49.8	79.2	4578	4000±25%	3600±25%				
EE2714	0.51	38.1	74.7	2851.5						
EE28	0.66	49.8	74.88	4259	5200±25%	4000±25%				
EE2821T	0.63	48.8	77	4534		3500±25%				
EEL28	0.99	73.65	73.84	6888	3100±25%	2400±25%				
EE30	1.28	63	48.9	4561		2300±25%		4600±25%		
EE3011	0.53	57.8	110	6358		4000±25%				
EE33-27	0.59	68.24	114.1	7786.4		4000±25%				
EE35	0.7	69.2	98.6	6820		3500±25%				9600±25%
EE3514	0.7	50.93	72	3666.6		4300±25%				
EE40	0.55	78.68	141.8	11161		4300±25%				
EE4133	0.47	77.46	162.1	12559		5500±25%				
EE42	0.6	97.8	180	17600	5000±25%	3800±25%				
EE4214	0.59	56.68	95.68	5423.4			3800±25%			
EE4220	0.4	97.8	242	24698		5000±25%				
EE50	0.43	96.82	225.7	21855.6		5400±25%				
EE5154	0.62	118.8	192	22866		4700±25%				
EE55A	0.428	121	283	37810		5500±25%				
EE55B	0.35	123	354	43542	8000±25%	6500±25%				
EE56	0.37	124.4	340.3	42336		6500±25%				
EE5625	0.28	124.25	438.47	54481.1			9000±25%			



型号 Type	有效参数 Effective parameter				AL 值 AL (nH/N2)					
	C1 (mm-1)	Le (mm)	Ae (mm2)	Ve (mm3)	GS3	GP4	GP95	GH5	GH7	GH10
EE65A	0.4	147	378.9	58655	7000±25%	5400±25%				
EE65B	0.274	147	540	79000	10000±25%	7900±25%				
EE70	0.208	145.5	700	101900		9500±25%	12000±25%			
EE7091	0.52	203.6	386.1	78649.6			6300±25%			
EE7091B	0.34	203.6	584.13	11898			9000±25%			
EE7091C	0.26	203.6	772.2	157299			12500±25%			
EE80	0.446	183.5	399	73150	5200±25%	4500±25%				
EE85	0.27	196.3	686	145320		7500±25%				
EE85B	0.23	191.2	818.4	173271		9500±25%				
EE100	0.349	271	775	222726		10000±25%				
EE110	0.19	243.1	1282	311810		10000±25%				
EE118	0.3	378.6	1249.5	473134		7900±25%				