




UF、UI 型磁芯




型号 Type	尺寸 Dimension (mm)						重量 (g)
	A	B	C	D	E	F	
UU4.6	4.2 ± 0.20	4.2 ± 0.20	$3.25 + 0.1 / - 0.15$	$1.4 + 0.1 / - 0.15$	1.35 ± 0.25	2.7 ± 0.15	0.4
UF9.8	9.8 ± 0.30	7.2 ± 0.25	2.80 ± 0.2	2.8 ± 0.20	4.1min	4.4 ± 0.25	1.5
UF10.5	10.5 ± 0.35	7.9 ± 0.25	5.00 ± 0.3	2.6 ± 0.25	5.2min	5.4 ± 0.30	2.8
UF1523	15.0 ± 0.50	11.7 ± 0.30	6.50 ± 0.3	5.1 ± 0.30	5.0min	5.9 ± 0.30	9.1
UF15.7	15.9 ± 0.30	10.0 ± 0.20	5.90 ± 0.2	4.5 ± 0.20	6.8min	6.1 ± 0.20	6.8
UF1620	16.0 ± 0.30	10.5 ± 0.20	5.90 ± 0.2	4.5 ± 0.20	6.8min	6.5 ± 0.35	7.5
UU1654	16.2 ± 0.30	27.0 ± 0.30	10.0 ± 0.2	9.0 ± 0.30	7.2 ± 0.30	22.5 ± 0.2	29.6
UF1936	19.7 ± 0.40	18.0 ± 0.50	6.00 ± 0.3	6.0 ± 0.20	7.4min	12.0 ± 0.40	15.2
UF20.3	20.3 ± 0.30	13.6 ± 0.20	10.9 ± 0.2	4.9 ± 0.20	10.4min	8.7 ± 0.30	19.6
UF2132	21.4 ± 0.50	15.9 ± 0.30	7.30 ± 0.3	7.3 ± 0.30	6.0min	8.5 ± 0.20	21.0
UF2532	25.4 ± 0.50	16.0 ± 0.30	6.35 ± 0.3	6.35 ± 0.3	12.4min	9.65 ± 0.2	18.0
UU2758	27.2 ± 0.30	29.0 ± 0.30	10.0 ± 0.3	6.5 ± 0.20	14.2 ± 0.3	22.5 ± 0.3	48.6
UF3143	30.5 ± 0.60	21.8 ± 0.40	6.70 ± 0.3	11.8 ± 0.40	6.9 ± 0.4	10.0 ± 0.40	40.4
UU3138	31.0 ± 0.50	19.1 ± 0.20	13.85 ± 0.2	6.0 ± 0.30	19.0 ± 0.5	13.1 ± 0.30	46.2
UF3327	33.0 ± 0.50	13.5 ± 0.20	7.20 ± 0.2	7.2 ± 0.20	18.0min	6.15 ± 0.20	24.5
UU3935	39.0 ± 0.50	17.5 ± 0.30	11.50 ± 0.3	7.0 ± 0.20	25.0 ± 0.4	10.50 ± 0.30	53.0
UU46	46.5 ± 0.5	39.6 ± 0.25	28.2 ± 0.3	14.15 ± 0.25	18 ± 0.5	25.7 ± 0.25	389
UU100	100 ± 1.5	45.4 ± 0.35	30 ± 0.35	39.4 ± 0.8	30.5 ± 0.35	15 ± 0.25	1022

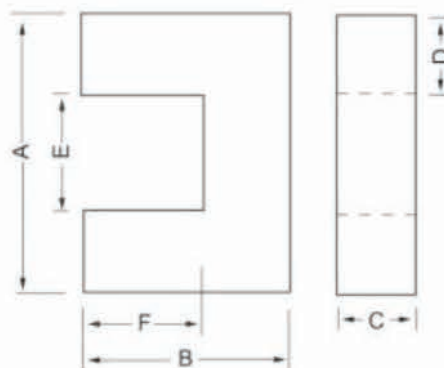

UF、UI 型磁芯

型号 Type	有效参数				AL 值 AL (nH/N ²)				
	C _i	Le	Ae	Ve	GP4	GH5	GH7	GH10	GH12
UU4.6	3.79	18.0	4.75	85.7					900±25%
UF9.8	4.30	34.2	7.90	271	450±25%	980±25%	1200±25%	2500±25%	3000±25%
UF10.5	3.05	40.0	13.00	520	640±25%	1400±25%	1700±25%	2500±25%	3000±25%
UF1523	1.52	50.2	34.20	1719	1750±25%				
UF15.7	1.98	51.3	26.00	1330		2000±25%	3000±25%	3300±25%	4500±25%
UF1620	2.12	51.7	23.30	1202	1000±25%	2000±25%	2800±25%	3600±25%	4500±25%
UU1654	2.60	45.0	118.0	5334	1250±25%				
UF1936	2.29	81.0	35.30	2860		2400±25%	3000±25%	3700±25%	
UF20.3	1.41	75.1	53.41	4055	930±25%				
UF2132	1.27	68.6	54.00	3700	1800±25%				
UF2532	2.09	83.7	40.00	3360		2600±25%	3300±25%	4100±25%	
UU2758	2.14	64.8	138.8	9001	1140±25%				
UU3143	1.15	90.87	79.06	7184	2300±25%				
UU3138	1.31	109.2	83.10	9079	2300±25%				
UF3327	1.61	84.6	52.50	4440			4000±25%	4500±25%	
UU3935	1.34	112.6	83.47	9404	3500±25%				
UU46	0.46	183	397.7	72827	4600±25%				
UU100	0.25	234	910	213000	8600±30%				

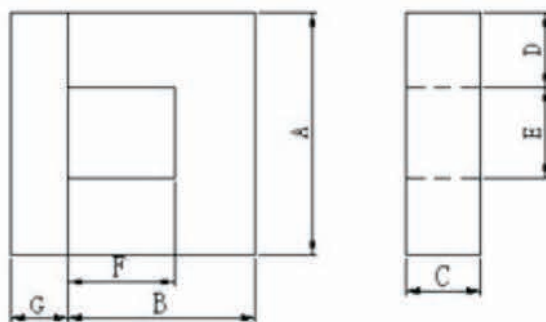

型号 Type	尺寸 Dimension (mm)							重量 (g)
	A	B	C	D	E min	F	G	
UI12.7	12.7±0.3	6.35±0.7	5.00±0.2	2.50±0.2	7.3	3.80±0.4	2.70±0.15	2.7
UI25.4	25.4±0.5	16.25±0.3	6.35±0.3	6.35±0.3	12.4	10.25±0.3	6.35±0.30	15.0

型号 Type	有效参数				AL 值 AL (nH/N ²)		
	C _i	Le	Ae	Ve	GH5	GH7	GH10
UI12.7	2.60	32.5	12.5	436	1000±25%		
UI25.4	1.73	70.0	40.0	2838	3100±25%	3900±25%	4100±25%