







ED、EDR 型磁芯

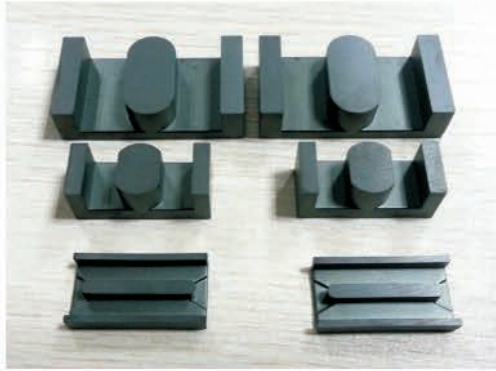


图例1



图例2



图例3



型号	图例	尺寸						
		A	B	C	D	E min	F	G
EDR2510	2	25.0±0.4	5.15±0.15	12.15±0.20	21.6±0.3	8.1	3.65±0.15	2.95±0.15
EDR2609	2	26.0±0.5	4.60±0.20	13.50±0.50	21.7±0.3	10.4	2.70±0.20	2.70±0.20
EDR2810	2	28.0±0.5	5.15±0.15	13.6±0.3	25.3±0.3	10.7±0.6	3.6±0.25	
ED2821	1	28.0±0.5	10.40±0.30	12.10±0.50	8.5±0.2	20.5	6.70±0.30	
ED2929	1	29.8±0.8	14.80±0.20	11.60±0.20	8.4±0.2	21.8	11.20±0.20	
ED2919	1	29.3±0.4	9.15±0.15	11.70±0.20	8.4±0.2	21.5	6.10±0.20	
EDR3208 (H)	2	32.0±0.5	4.10±0.20	11.70±0.40	27.8±0.2	8.7	2.65±0.20	2.20±0.20
ED3814	3	38.2±0.5	7.35±0.20	14.00±0.20	32.0min	6.0±0.2	4.60±0.20	
ED4019	1	40.8±0.5	9.70±0.20	21.85±0.25	11.0±0.3	30.3	6.25±0.25	
EDR4111	2	41.3±0.5	5.65±0.15	19.6±0.4	37.2±0.35	14.7	3.15±0.2	4.5±0.25
ED4214-2	3	42.7±0.5	7.2±0.15	15.0±0.3	7.0±0.25	36.2±0.5	4.4±0.15	
ED4314	3	43.6±0.5	7.35±0.20	16.00±0.25	7.4±0.2	36.8	4.60±0.20	
EDR5111	2	50.8±0.8	5.6±0.15	19.8±0.4	48.5±0.5	15.0±0.6	3.3±0.2	4.6±0.35

型号	有效参数		重量(g)	AL 值 AL(nH/N ²)	
	Le (mm)	Ae (mm ²)		GP4	GP95
EDR2510			11.3	4000±25%	
EDR2609	20.1	58.5	13.0	2370±25%	
EDR2810	42.3	73.2	12.4	3500±25%	
ED2821	50.3	90.0	24.0	3800±25%	
ED2929	69.2	90.0	33.6	2750±25%	
ED2919	50.3	90.7	23.2		4500±25%
EDR3208	22.4	82.7	11.6	4400±25%	
ED3814	54.6	74.3	24.2		
ED4019	61.3	203.0	62.6		11500±25%
EDR4111		158.2	33.4	4400±25%	
ED4214-2	54	87	28.4	3200±25%	
ED4314	59.4	90.9	31		
EDR5111	32.83	220	44.3		13000±25%