




环形磁芯 TOROIDAL CORES



型号 Type	尺寸 Dimension(mm)			重量 (g)
	D1	D2	H	
T6*3*3	6.0±0.3	3.0±0.3	3.0±0.2	0.3
T8*4*4	8.0±0.3	4.0±0.3	4.0±0.3	0.74
T8*5*3	8.0±0.3	5.0±0.3	3.0±0.2	0.45
T9*5*3	9.0±0.3	5.0±0.3	3.0±0.2	0.6
T10*5*5	10.0±0.3	5.0±0.3	5.0±0.3	1.4
T10*6*2.8	10.0±0.3	6.0±0.3	2.8±0.2	0.7
T10*6*3.5	10.0±0.3	6.0±0.3	3.5±0.2	0.85
T10*6*4	10.0±0.3	6.0±0.3	4.0±0.2	0.96
T10*6*5	10.0±0.3	6.0±0.3	5.0±0.3	1.2
T12*6*4	12.0±0.4	6.0±0.3	4.0±0.3	1.6
T12.7*7.92*6.35	12.7±0.4	7.92±0.3	6.35±0.3	2.3
T13*7*5	13.0±0.4	7.0±0.3	5.0±0.3	2.3
T14*8*7	14.0±0.4	8.0±0.3	7.0±0.3	3.4
T14*9*5	14.0±0.4	9.0±0.3	5.0±0.3	2.1
T14.6*10.5*3.7	14.6±0.3	10.5±0.3	3.7±0.3	1.5
T16*9*5	16.0±0.4	9.0±0.3	5.0±0.3	3.2
T16*10*7	16.0±0.4	10.0±0.3	7.0±0.3	4.1
T16*12*8	16.0±0.3	12.0±0.3	8.0±0.3	3.4
T18*10*6.35	18.0±0.4	10.0±0.3	6.35±0.3	5.3
T18*10*10	18.0±0.4	10.0±0.3	10.0±0.3	8.3
T19*9*10	19.0±0.4	9.0±0.3	10.0±0.3	10.5
T19*11*10	19.0±0.4	11.0±0.3	10.0±0.3	9.1

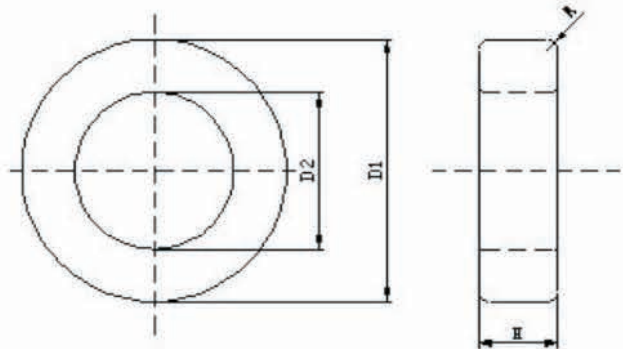

型号 Type	尺寸 Dimension (mm)			重量 (g)
	D1	D2	H	
T19*13*11	19.0±0.4	13.0±0.3	11.0±0.3	7.98
T20*10*7	20.0±0.4	10.0±0.3	7.0±0.3	8.0
T20*10*10	20.0±0.4	10.0±0.3	10.0±0.3	11.5
T20*12*10	20.0±0.4	12.0±0.4	10.0±0.3	9.8
T22*14*8	22.0±0.4	14.0±0.4	8.0±0.3	8.8
T22*14*10	22.0±0.4	14.0±0.4	10.0±0.3	10.8
T22*14*12.7	22.0±0.4	14.0±0.4	12.7±0.3	13.6
T25*15*10	25.0±0.4	15.0±0.4	10.0±0.3	14.8
T25*15*12	25.0±0.4	15.0±0.4	12.0±0.3	18
T25*15*13	25.0±0.4	15.0±0.4	13.0±0.3	19.5
T26*14.5*20	26.0±0.5	14.5±0.4	20.0±0.4	35
T28*16*16	28.0±0.4	16.0±0.4	16.0±0.3	31
T28*18*13	28.0±0.4	18.0±0.4	13.0±0.3	23
T29*18*15	29.0±0.5	18.0±0.4	15.0±0.3	29
T29*19*15	29.0±0.5	19.0±0.4	15.0±0.3	27.2
T31*18*14	31.0±0.5	18.0±0.5	14.0±0.4	33.6
T31*19*13	31.0±0.5	19.0±0.5	13.0±0.4	29.5
T31*19*15	31.0±0.5	19.0±0.5	15.0±0.4	34
T31*20*15	31.0±0.5	20.0±0.4	15.0±0.4	31.7
T33*21.5*15	33.0±0.6	21.5±0.5	15.0±0.4	35.4
T34*21.8*21	34.0±0.6	21.8±0.6	21.0±0.4	55
T36*19*13	36.0±0.5	23.0±0.5	15.0±0.4	45.8
T36*23*15	36.0±0.5	23.0±0.5	15.0±0.4	44
T37*22*15	37.0±0.5	22.0±0.5	15.0±0.4	50
T37*23*15	37.0±0.5	23.0±0.5	15.0±0.4	48.5
T38*19*13	38.0±0.5	19.0±0.5	13.0±0.4	52.5
T38*19*15	38.0±0.5	19.0±0.5	15.0±0.4	60
T38*19*21	38.0±0.5	19.0±0.5	21.0±0.4	85
T38*20.5*15	38.0±0.5	20.5±0.5	15.0±0.4	58
T38*22*15	38.0±0.5	22.0±0.5	15.0±0.4	55
T38*25*15	38.0±0.5	25.0±0.5	15.0±0.4	46.3
T40*23*20	40.0±0.8	23.0±0.6	20.0±0.5	81
T40*25*20	40.0±0.8	25.0±0.6	20.0±0.5	73.5
T42*26*18	42.0±0.8	26.0±0.6	18.0±0.6	74
T45*30*15	45.0±0.8	30.0±0.6	15.0±0.4	64
T47*27*15	47.0±0.8	27.0±0.6	15.0±0.4	84
T48*30*10	48.0±1.0	30.0±0.5	10.0±0.3	55
T48*30*15	48.0±1.0	30.0±0.5	15.0±0.4	79
T49*31*15	49.0±0.6	31.0±0.6	15.0±0.4	81
T49*31*19	49.0±0.6	31.0±0.6	18.8±0.3	103
T49*31.8*19	49.0±0.6	31.8±0.6	18.8±0.3	96
T49*33.8*19	49.0±0.6	33.8±0.6	19.0±0.3	90
T50*25*20	50.0±1.0	25.0±0.6	20.0±0.6	141.3



型号 Type	尺寸 Dimension (mm)			重量 (g)
	D1	D2	H	
T50*30*20	50.0±1.0	30.0±0.6	20.0±0.6	120.6
T51*31*13	51.0±1.0	31.0±0.8	13.0±0.4	83
T56*28*28	56.0±1.0	28.0±0.8	28.0±0.6	248
T56*32*18	56.0±1.0	32.0±1.0	18.0±0.6	143
T56*36*20	56.0±1.0	36.0±1.0	20.0±0.6	136
T58*40*18	58.0±1.5	40.0±1.0	18.0±0.6	120
T60*38*20	60.0±1.5	38.0±1.0	20.0±0.6	162
T60*40*20	60.0±1.5	40.0±1.0	20.0±0.6	150
T63*38*12.7	63.0±1.0	38.0±0.5	12.7±0.5	120
T63*38*25	63.0±1.5	38.0±1.0	25.0±0.8	236
T68*44*15	68.0±1.5	44.0±0.8	15.0±0.5	152
T74*40*13	74.0±1.5	40.0±1.0	13.0±0.4	188
T80*40*15	80.0±1.5	40.0±1.0	15.0±0.5	272
T80*50*20	80.0±1.5	50.0±1.0	20.0±0.8	293
T86*63*30	86.0±2.0	63.0±1.5	30.0±0.5	388
T87*54*14	87.0±2.0	54.0±2.0	14.0±0.5	245
T87*54*30	87.0±2.0	54.0±2.0	30.0±1.0	526
T100*50*20	100.0±1.2	50.0±0.9	20.0±0.4	560
T102*66*15	102.0±2.0	66.0±2.0	15.0±0.6	336

磁环高度可根据客户要求调整

The height can be adjusted as customers' requirement

型号 Type	有效参数 Effective parameter				AL 值 AL (nH/N ²)				
	C _i (mm ⁻¹)	Le (mm)	Ae (mm ²)	Ve (mm ³)	GS3	GP4	GH5	GH7	GH10
T6*3*3	3.13	14.1	4.5	63.5	1300±30%	1000±30%	2250±30%	3150±30%	4200±30%
T8*4*4	2.36	18.84	8.0	150.7	1600±30%	1230±30%	2940±30%	3733±30%	5333±30%
T8*5*3	4.53	20.41	4.50	91.85	830±30%	640±30%	1500±30%	1950±30%	2770±30%
T9*5*3	3.66	22.0	6.0	132	1100±30%	850±30%	1900±30%	2600±30%	3500±30%
T10*5*5	1.88	23.5	12.5	294	2000±30%	1530±30%	3600±30%	4660±30%	6660±30%
T10*6*2.8	4.48	25.12	5.6	141	840±30%	650±30%	1550±30%	1960±30%	2800±30%
T10*6*3.5	3.59	25.12	7.0	175.84	1050±30%	800±30%	1930±30%	2450±30%	3500±30%
T10*6*4	3.14	25.12	8.0	200	1200±30%	920±30%	2200±30%	2800±30%	4000±30%
T10*6*5	2.51	25.12	10.0	251.2	1600±30%	1200±30%	2800±30%	3800±30%	5100±30%
T12*6*4	2.35	28.26	12	339	1600±30%	1220±30%	2900±30%	3800±30%	5100±30%
T12.7*7.92*6.35	2.13	31.2	15.17	491	1900±30%	1440±30%	3300±30%	4500±30%	6000±30%
T13*7*5	2.09	31.4	15	471	1800±30%	1380±30%	3300±30%	4200±30%	6000±30%
T14*8*7	1.64	34.54	21.0	725	2300±30%	1760±30%	3900±30%	5460±30%	7000±30%
T14*9*5	2.89	36.1	12.5	452	1400±30%	1060±30%	2400±30%	3300±30%	4400±30%
T14.6*10.5*3.7	5.19	39.41	7.58	298	730±30%	550±30%	1330±30%	1700±30%	2400±30%
T16*9*5	2.24	39.25	17.5	686.87	1680±30%	1290±30%	2800±30%	3920±30%	5600±30%



型号 Type	有效参数 Effective parameter				AL 值 AL (nH/N ²)				
	C _i (mm ⁻¹)	Le (mm)	Ae (mm ²)	Ve (mm ³)	GS3	GP4	GH5	GH7	GH10
T16*10*7	1.94	40.82	21	857.22	1950±30%	1480±30%	3230±30%	4523±30%	6450±30%
T16*12*8	2.75	43.96	16	703	1500±30%	1100±30%	2500±30%	3500±30%	4600±30%
T18*10*6.35	1.73	43.96	25.4	1116.58	2400±30%	1800±30%	4100±30%	5600±30%	7500±30%
T18*10*10	1.1	43.96	40	1758.4	3800±30%	2800±30%	6500±30%	8800±30%	11800±30%
T19*9*10	0.84	40.1	47.7	1916	4280±30%	3280±30%	7850±30%	10000±30%	14200±30%
T19*11*10	1.18	47.1	40	1884	3200±30%	2450±30%	5860±30%	7460±30%	10660±30%
T19*13*11	1.52	50.24	33	1657.92	2470±30%	1900±30%	4550±30%	5800±30%	8300±30%
T20*10*7	1.34	47.1	35	1648.5	2900±30%	2150±30%	5150±30%	6550±30%	9340±30%
T20*10*10	0.942	47.1	50	2355	4200±30%	3300±30%	6930±30%	9200±30%	13860±30%
T20*12*10	1.25	50.24	40	2009	3000±30%	2300±30%	5500±30%	7000±30%	10000±30%
T22*14*8	1.76	56.52	32	1808.64	2300±30%	1700±30%	4000±30%	5000±30%	7200±30%
T22*14*10	1.41	56.52	40	2260.8	2700±30%	2100±30%	5000±30%	6300±30%	9000±30%
T22*14*12.7	1.11	56.52	50.8	2871	3800±30%	3000±30%	7800±30%	9200±30%	11500±30%
T25*15*10	1.25	62.8	50	3140	2900±30%	2200±30%	5400±30%	7500±30%	9200±30%
T25*15*12	1.04	62.8	60	3768	3900±30%	2900±30%	6700±30%	9200±30%	12000±30%
T25*15*13	0.96	62.8	65	4082	4300±30%	3200±30%	7300±30%	10000±30%	13300±30%
T26*14.5*20	0.55	63.58	115	7312.2	6800±30%	5250±30%	11700±30%	16300±30%	23000±30%
T28*16*16	0.72	69.08	96	6631.68	5600±30%	4600±30%	8950±30%	12500±30%	17900±30%
T28*18*13	1.11	72.22	65	4694.3	4000±30%	3000±30%	5500±30%	7600±30%	11000±30%
T29*18*15	0.89	73.79	82.5	6087	4200±30%	3200±30%	7700±30%	9800±30%	14000±30%
T29*19*15	1.00	75.36	75	5652	3750±30%	2870±30%	6800±30%	9000±30%	12000±30%
T31*18*14	0.84	76.93	91	7000	4500±30%	3400±30%	8600±30%	10500±30%	14000±30%
T31*19*13	1.00	78.5	78	6123	3800±30%	2800±30%	7000±30%	8800±30%	12700±30%
T31*19*15	0.87	78.5	90	7065	4700±30%	3700±30%	7800±30%	11200±30%	13600±30%
T31*20*15	0.97	80.07	82.5	6605.7	3880±30%	3000±30%	5900±30%	9000±30%	12000±30%
T33*21.5*15	0.98	83	84.9	7054	3800±30%	2900±30%	6330±30%	8860±30%	12660±30%
T34*21.8*21	0.68	87.6	128.1	11222	5500±30%	4230±30%	10100±30%	12850±30%	18360±30%
T36*19*13	0.75	80.78	106.8	8628	5300±30%	3700±30%	8800±30%	12000±30%	16000±30%
T36*23*15	0.95	92.63	97.5	9032	4000±30%	3200±30%	7400±30%	9300±30%	13500±30%
T37*22*15	0.82	92.63	112.5	10420	4270±30%	3500±30%	7627±30%	10677±30%	15250±30%
T37*23*15	0.89	94.2	105	9891	4200±30%	3220±30%	7700±30%	9800±30%	14000±30%
T38*19*13	0.722	89.49	123.5	11052	5200±30%	4000±30%	9500±30%	12100±30%	17300±30%
T38*19*15	0.628	89.49	142.5	12752	6000±30%	4600±30%	11000±30%	14000±30%	20000±30%
T38*19*21	0.448	89.49	199.5	17853	8400±30%	6440±30%	15400±30%	19600±30%	28000±30%
T38*20.5*15	0.7	91.8	131	12054	5400±30%	4140±30%	9900±30%	12600±30%	18000±30%
T38*22*15	0.785	94.2	120	11304	4800±30%	3680±30%	8800±30%	11200±30%	16000±30%
T38*25*15	1.01	98.9	97.5	9643	3714±30%	2850±30%	6800±30%	8666±30%	12380±30%
T40*23*20	0.581	98.9	170	16814.7	6500±30%	5000±30%	11800±30%	15100±30%	21500±30%
T40*25*20	0.68	102	150	15307	5530±30%	4240±30%	10150±30%	12920±30%	18450±30%
T42*26*18	0.741	106.76	144	15373	5080±30%	3896±30%	9317±30%	11858±30%	16941±30%
T45*30*15	1.046	117.75	112.5	13246.8	3600±30%	2760±30%	6600±30%	8400±30%	12000±30%
T47*27*15	0.77	116.18	150	17427	4860±30%	3730±30%	8900±30%	11350±30%	16210±30%



型号 Type	有效参数 Effective parameter				AL 值 AL (nH/N ²)				
	C _i (mm ²)	Le (mm)	Ae (mm ²)	Ve (mm ³)	GS3	GP4	GH5	GH7	GH10
T48*30*10	1.36	122.46	90	11021	2800±30%	2130±30%	5070±30%	6500±30%	9230±30%
T48*30*15	0.91	122.46	135	16532	4500±30%	3400±30%	7800±30%	10600±30%	14000±30%
T49*31*15	0.93	125.6	135	16956	4050±30%	3100±30%	7430±30%	9500±30%	13500±30%
T49*31*19	0.735	125.6	171	21477	5130±30%	3950±30%	7800±30%	11900±30%	17100±30%
T49*31.8*19	0.77	126.8	163.4	20728	5130±30%	3950±30%	7800±30%	11900±30%	17100±30%
T49*33.8*19	0.9	130	144.4	18771	4185±30%	3200±30%	7670±30%	9765±30%	13950±30%
T50*25*20	0.471	117.75	250	29437.5	8000±30%	6133±30%	14666±30%	18666±30%	26666±30%
T50*30*20	0.628	125.6	200	25120	5600±30%	4600±30%	10000±30%	14000±30%	24000±30%
T51*31*13	0.99	128.74	130	16736	3800±30%	2900±30%	6900±30%	9000±30%	12600±30%
T56*28*28	0.32	121.9	376	45933	11200±30%	8586±30%	20500±30%	26100±30%	37000±30%
T56*32*18	0.639	138.16	216	29842	5900±30%	4500±30%	10800±30%	13500±30%	19600±30%
T56*36*20	0.575	138.16	240	33158.4	5220±30%	2300±30%	9500±30%	12100±30%	17300±30%
T58*40*18	1.0	150.7	144	21703	3960±30%	3050±30%	7200±30%	9250±30%	13200±30%
T60*38*20	0.7	153.8	220	33849	5385±30%	4130±30%	9870±30%	12560±30%	17950±30%
T60*40*20	0.785	157	200	31400	4800±30%	3680±30%	8800±30%	11200±30%	16000±30%
T63*38*12.7	0.99	158.57	158.75	25172.99	3800±30%	2900±30%	6840±30%	8800±30%	12500±30%
T63*38*25	0.50	158.57	312.5	59553	8500±30%	6500±30%	15500±30%	19800±30%	28300±30%
T68*44*15	0.976	175.84	180	31651.2	3850±30%	2950±30%	7000±30%	9000±30%	12800±30%
T74*40*13	0.809	178.98	221	39554	4650±30%	3550±30%	8500±30%	10800±30%	15500±30%
T80*40*15	0.604	174.2	288	50219	6000±30%	4600±30%	10000±30%	14000±30%	20000±30%
T80*50*20	0.68	204.1	300	61230	5500±30%	4250±30%	10100±30%	12900±30%	18000±30%
T86*63*30	0.67	230.3	342.2	78820	5500±30%	4250±30%	10100±30%	12900±30%	18000±30%
T87*54*14	0.958	221.3	231	51136.47	3950±30%	3000±30%	7200±30%	9000±30%	13000±30%
T87*54*30	0.45	221.37	495	109578	8400±30%	6450±30%	15000±30%	19500±30%	28000±30%
T100*50*20	0.471	235.5	500	117750	8000±30%	6100±30%	14600±30%	18600±30%	26600±30%
T102*66*15	0.977	263.76	270	71215	3850±30%	2950±30%	7000±30%	9000±30%	12500±30%