



ER ECO 型磁芯 ER ECO CORES

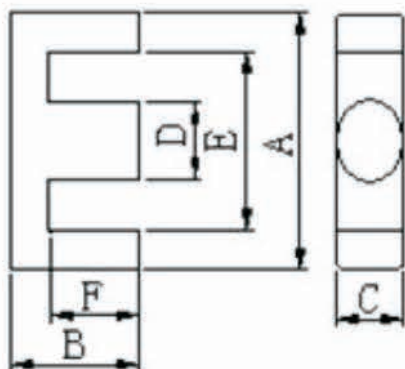


Fig. 1

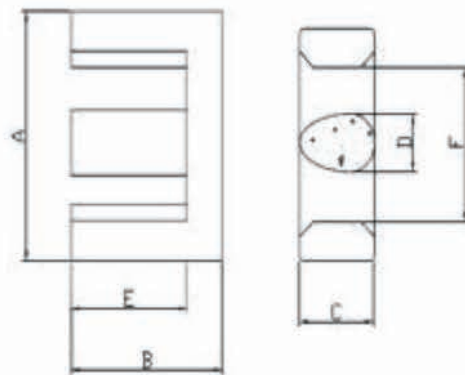


Fig. 2

型号	图例	尺寸						重量 (g)
		A	B	C	D	E	F	
ER20	Fig. 1	20.4±0.5	9.0±0.25	5.8±0.25	5.8±0.25	15.4 min	6.5±0.25	6.6
ER2010	Fig. 1	20.6±0.4	5.2±0.1	10.0±0.15	7.8±0.20	16.6 min	3.2±0.15	7.5
ER24	Fig. 1	24.0±0.5	11.5±0.3	5.8±0.25	5.8±0.25	17.0 min	8.3±0.3	10.5
EC021	Fig. 1	21.0±0.5	12.0±0.2	7.7±0.2	5.7±0.2	15.4 min	9.8±0.2	11.3
EC021-1	Fig. 2	21.0±0.5	11.8±0.3	7.7±0.2	5.78±0.2	9.5+0.2/-0.1	15.5 min	11.3
ER2416	Fig. 1	24.0±0.4	8.3±0.2	12.0±0.3	8.8±0.25	18.6min	5.7±0.25	16.2
ER4260	Fig. 1	42.0±0.6	30.0±0.2	13.5±0.25	13.5±0.25	29.7±0.4	23.0±0.20	
ER4228	Fig. 1	42.0±0.6	14.0±0.2	13.5±0.25	13.5±0.25	29.7±0.4	7.0±0.20	

型号	有效参数				AL 值 AL (nH/N²)	
	Cl	Le	Ae	Ve	GP4	GH7
ER20						3000±30%
ER2010	0.68	27.90	41.2	1156	2500±25%	
ER24						3500±30%
EC021					1500±25%	
EC021-1					1500±25%	
ER2416	0.68	43.07	63.3	2725.8	3200±25%	
ER4260						
ER4228						