




RM 型磁芯

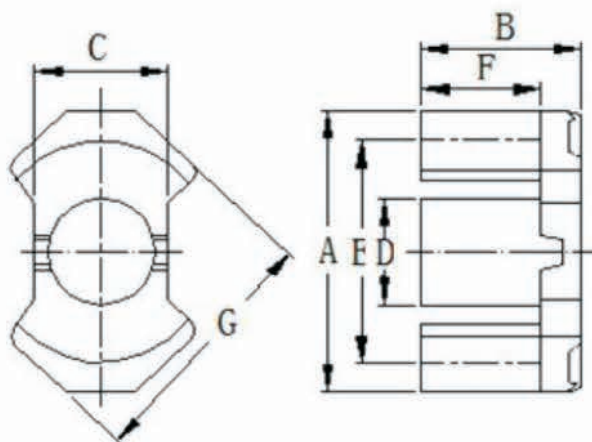

| Type 型号 | Dimension 尺寸(mm) | | | | | | |
|-----------|------------------|-----------|------------|------------|------------|------------|------------|
| | A | B | C | D | E | F | G |
| RM6 (H) | 17.60±0.30 | 6.2±0.15 | 8.00±0.20 | 6.20±0.10 | 12.65±0.25 | 4.10±0.15 | 14.40±0.30 |
| RM7 (H) | 20.1±0.40 | 6.75±0.15 | | 7.10±0.15 | 15.2min | 4.5±0.20 | 16.85±0.45 |
| RM8 (C H) | 22.75±0.45 | 8.2±0.15 | 10.80±0.20 | 8.40±0.15 | 17.30±0.30 | 5.50±0.15 | 19.30±0.40 |
| RM10 (H) | 27.85±0.65 | 9.3±0.15 | 13.25±0.25 | 10.70±0.20 | 21.65±0.45 | 6.35±0.15 | 24.15±0.55 |
| RM10D | 28.2±0.5 | 9.3±0.1 | 13.25±0.25 | 10.65±0.2 | 22.0±0.4 | 6.6±0.15 | 24.2±0.4 |
| RM12 | 36.90±0.70 | 12.3±0.30 | 15.90±0.30 | 12.60±0.30 | 25.50±0.60 | 8.50±0.30 | 29.20±0.70 |
| RM14 | 41.60±0.60 | 15.1±0.15 | 18.70±0.30 | 14.75±0.25 | 29.50±0.50 | 10.80±0.15 | 34.20±0.50 |

| Type 型号 | 有效参数 | | | | 重量 g | AL 值 AL(nH/N ²) |
|---------|------------------------|---------|-----------------------|-----------------------|------|-----------------------------|
| | C1 (mm ⁻¹) | Le (mm) | Ae (mm ²) | Ve (mm ³) | | GP4 |
| RM6 | 0.78 | 28.60 | 36.6 | 1050 | 6.1 | 2450±25% |
| RM7 | 0.74 | 32.80 | 43.6 | 1430 | 8.0 | 2500±25% |
| RM8 | 0.59 | 38.00 | 64.0 | 2400 | 13.8 | 2950±25% |
| RM10 | 0.45 | 44.00 | 98.0 | 4310 | 24.0 | 3630±25% |
| RM10D | 0.44 | 44 | 92.4 | 4066 | 24.6 | 4000±25% |
| RM12 | 0.41 | 56.00 | 140.0 | 7960 | 49.6 | 5200±25% |
| RM14 | 0.40 | 75.38 | 178.0 | 12600 | 80.0 | 6000±25% |

注：实际产品的材质可以根据客户的要求生产