




PQ 型磁芯



型号 Type	尺寸 Dimension (mm)						重量 (g)
	A	B	C	D	E	F	
PQ2016	21.00±0.50	8.30±0.15	14.00±0.25	8.80±0.15	17.5min	5.40±0.15	14.90
PQ2020	21.00±0.50	10.25±0.20	14.00±0.25	8.80±0.15	17.5min	7.30±0.20	17.00
PQ2016D	22.30±0.50	8.30±0.15	14.00±0.25	8.80±0.15	18.5min	5.40±0.15	15.00
PQ2620 (H)	26.50±0.60	10.10±0.25	19.00±0.50	12.00±0.30	22.0min	6.10±0.25	33.80
PQ2625 (H)	26.50±0.60	12.80±0.40	19.00±0.50	12.00±0.30	22.0min	8.70±0.30	39.60
PQ2620G	26.50±0.60	10.30±0.15	19.00±0.45	12.00±0.20	22.0min	6.00±0.30	34.60
PQ2720	27.50±0.50	10.00±0.20	19.00±0.50	12.00±0.30	23.2min	6.00±0.30	32.40

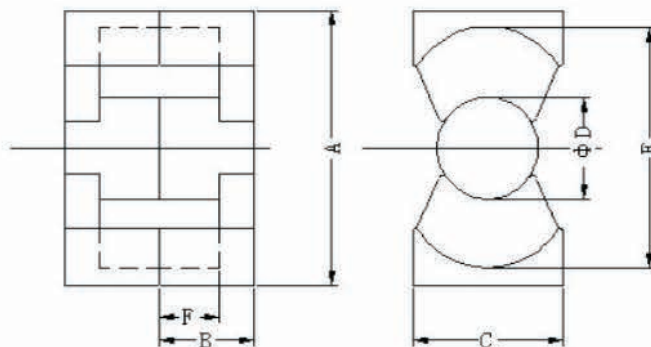

型号 Type	尺寸 Dimension(mm)						重量 (g)
	A	B	C	D	E	F	
PQ2725	27.50±0.50	12.50±0.20	19.00±0.50	12.00±0.30	23.2min	8.50±0.30	38.60
PQ2720J (H)	27.00±0.30	10.00±0.15	19.00±0.40	12.00±0.20	23.2min	6.00±0.20	32.40
PQ2720-1	27.4±0.60	10.4±0.15	19.00±0.40	12.00±0.20	22.3min	6.05±0.20	35.00
PQ3211	32.50±0.70	5.60±0.20	22.00±0.50	13.45±0.25	26.0min	2.60±0.20	28.70
PQ3220 (H)	32.50±0.70	10.20±0.30	22.00±0.50	13.40±0.30	26.0min	5.75±0.30	47.30
PQ3225 (H)	32.50±0.70	12.50±0.25	22.00±0.50	13.40±0.30	26.0min	8.40±0.25	53.10
PQ3230 (H)	32.50±0.70	15.20±0.15	22.00±0.50	13.40±0.30	26.0min	10.65±0.20	59.20
PQ3325	33.00±0.50	11.80±0.20	22.00±0.50	13.45±0.25	27.7min	8.30±0.20	49.20
PQ3513 (H)	35.00±0.60	6.80±0.15	18.60±0.40	12.90±0.30	29.8±0.60	4.10±0.15	29.40
PQ3531 (H)	35.00±0.60	15.60±0.20	26.00±0.50	14.35±0.25	32.0±0.50	10.60±0.20	72.00
PQ3535 (H)	35.00±0.60	17.50±0.20	26.00±0.50	14.35±0.25	32.0±0.50	12.50±0.20	79.00
PQ3811	38.00±0.65	5.60±0.15	21.32±0.40	14.30±0.25	32.8±0.65	2.60±0.15	32.10
PQ3813	38.00±0.65	6.50±0.15	21.32±0.40	14.30±0.25	32.8±0.65	3.50±0.15	36.20
PQ4129	41.50±1.00	14.70±0.25	28.00±0.60	14.80±0.30	38.0±0.90	9.60±0.25	84.20
PQ4140	41.50±1.00	19.90±0.25	28.00±0.60	14.80±0.30	38.0±0.90	14.8±0.25	103.8
PQ5050	50.00±0.70	25.20±0.20	32.00±0.50	20.00±0.35	44.0±0.70	18.30±0.20	208.00

型号 Type	有效参数				AL 值 AL(nH/N ²)
	C1	Le	Ae	Ve	GP4
PQ2016	0.605	37.40	62.00	2310	3400±25%
PQ2020	0.738	45.40	62.00	2814	2880±25%
PQ2016D	0.658	35.59	60.09	2379	2300±25%
PQ2620	0.391	46.30	119.00	5490	4800±25%
PQ2625	0.472	55.50	118.00	6530	4300±25%
PQ2620G	0.428	49.63	115.86	5750	5500±25%
PQ2720	0.380	45.70	114.50	5233	5500±25%
PQ2725	0.470	55.75	114.50	6504	4300±25%
PQ2720J	0.400	45.70	114.50	5233	5500±25%
PQ2720-1	0.40	47.70	120.00	5724	5500±25%
PQ3211	5.046	36.30	145.80	5300	8600±25%
PQ3220	0.326	55.90	169.00	9447	6000±25%
PQ3225	0.430	66.59	155.00	10321	5000±25%
PQ3230	0.448	74.60	161.00	12000	4700±25%
PQ3325	0.410	65.80	161.80	10663	5500±25%
PQ3513	0.440	44.20	105.00	4641	5500±25%
PQ3531	0.478	73.70	154.00	11355	4200±25%
PQ3535	0.448	87.90	196.00	17260	4200±25%
PQ3811	4.309	41.00	140.50	5760	7500±25%
PQ3813	3.881	44.40	137.00	6080	7500±25%
PQ4129	0.390	73.42	184.40	13577	4800±25%
PQ4140	0.510	94.13	184.4	17361	3900±25%
PQ5050	0.348	113.00	314.00	37623	6400±25%

注：以上产品的材质，可以根据客户的要求进行调整，可以使用GP4/GP44/GP47/GP95